


Braided Vinyl Tubing

PRODUCT

Braided Vinyl Tubing

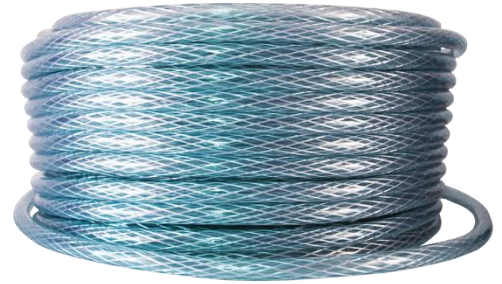

APPLICATION


Air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

ADVANTAGES

Select DiversiTech® braided tubing over standard clear vinyl tube because the design is kink resistant, but the lightweight and flexible tubing can withstand rough handling and multiple usage while maintaining dimensional stability. Made of high-quality material with smooth interior and exterior that prevents sediment accumulation, allows easy flow & flushing and is easy to shape, bend and install.

GENERAL CHARACTERISTICS

- Ten sizes from 1/4" to 3/4" Diameters
- Clear Vinyl Chloride (PVC)
- Reinforced polyester caliber 300-500
- Extra rigid design resists crimping and kinking due to durometer value of 78-80 (shore A)
- Service Temperature 140° F (60° C)

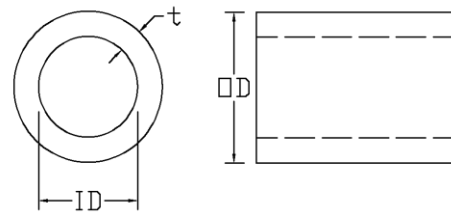

ITEM #	Nominal Size (in)	Inner Diameter (in)	ID Tolerance (in)	ID Max (in)	ID Min (in)	Length (ft)	Roll Weight (lb)	Working Pressure (PSIG)
7-14B	1/4	0.250	0.0080	0.258	0.242	100	5.04	206
7-14B50	1/4	0.250	0.0080	0.258	0.242	50	2.52	206
7-38B	3/8	0.375	0.0150	0.390	0.360	100	7.17	183
7-38B50	3/8	0.375	0.0150	0.390	0.360	50	3.59	183
7-12B	1/2	0.500	0.0250	0.525	0.475	100	8.07	135
7-12B50	1/2	0.500	0.0250	0.525	0.475	50	4.04	135
7-58B	5/8	0.625	0.0300	0.655	0.595	100	12.60	110
7-58B50	5/8	0.625	0.0300	0.655	0.595	50	6.30	110
7-34B	3/4	0.750	0.0350	0.785	0.715	100	17.13	100
7-34B50	3/4	0.750	0.0350	0.785	0.715	50	8.57	100