
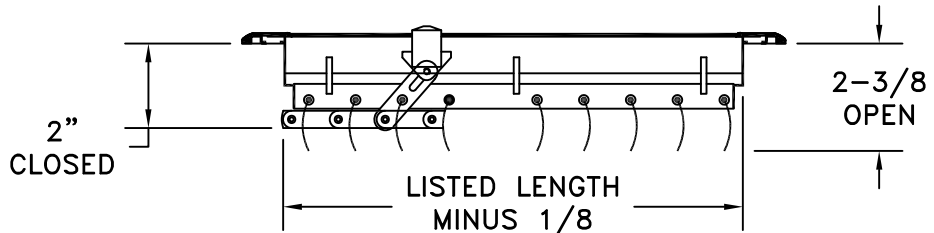


- ALL EXTRUDED ALUMINUM CONSTRUCTION
- HEAVY CROSS BRACING REINFORCEMENT FOR FLOOR USE
- DUAL DIRECTION MULTI-SHUTTER VALVE FOR ADJUSTABLE AIR PATTERN
- NYLON SLIDE VALVE OPERATORS
- BLADE SPACING ON 1/2 INCH CENTERS WITH 5/16 INCH OPENING BETWEEN BLADES
- FINISH: SATIN ANODIZED (SA)
- MEETS LOAD TEST REQUIREMENTS OF THE INTERNATIONAL MECHANICAL CODE SECTION 603.18.1 AND H.U.D. 3280.715(e)(2)

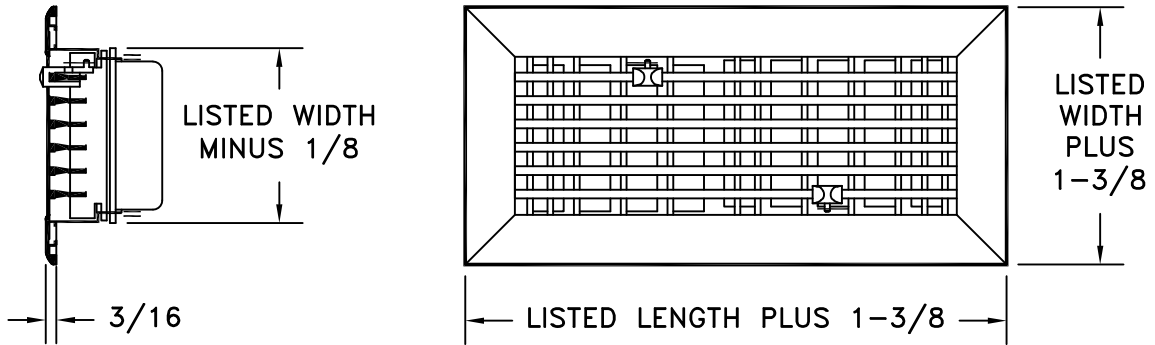

LISTED SIZE
W X L
2-7/16 X 10
2-7/16 X 12
2-7/16 X 14
4 X 10
4 X 12
4 X 14
6 X 10
6 X 12
6 X 14

JOB NAME: _____	SUBMITTED BY: _____	DATE: 09/17/2021	SD-2100
LOCATION: _____		<b>531</b> Extruded Aluminum Floor Diffuser	
ARCHITECT: _____			
ENGINEER: _____			
CONTRACTOR: _____			